Shenzhen Socay Electronics Co., Ltd. socaydiode.com

SOCAY China Power Thermist NTC Thermistor MF72 Serise SCN10D-13 10Ω 13mm Wide Resistance Range

Basic Information

• Place of Origin: Shenzhen, Guangdong, China

• Brand Name: SOCAY

Certification: UL,REACH,ROHS,ISOModel Number: MF72-SCN8D-13

Minimum Order Quantity: 250PCS
Price: Negotiable
Packaging Details: Bulk
Delivery Time: 5-7 days

• Payment Terms: T/T, Western Union, MoneyGram

Supply Ability: 250,000PCS Per Month



Product Specification

• Resistance At 25 ±20%: 10Ω

 Max. Permissible Working 4A Current:

Gurrent.

Resistance Under Load 206mΩ

 $(m\Omega)$:


Dissipation Factor: 15mW/
Thermal Time Constant: 65Sec.
Maximum Permissible 330uF

Capacitance @240Vac:

Body Size: 13mmMOQ: 250PCS



More Images

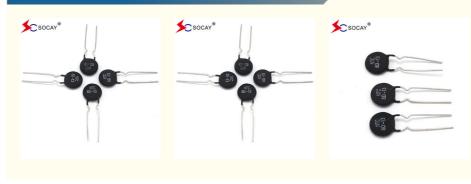

Product Description

SOCAY China Power Thermist NTC Thermistor MF72 Serise SCN10D-13 10 Ω 13mm Wide Resistance Range

DATASHEET: MF72-SCN10D-13_v2105.1.pdf

1.Product Details:

Place of Origin	Shenzhen,Guangdong,China	
Brand Name	SOCAY	
Model Number	MF72-SCN8D-13	
Certification	UL,REACH,ROHS,ISO	

2.Payment & Shipping Terms:

Minimum Order Quantity	250PCS
Price	Negotiable
Packaging Details	Bulk
Delivery Time	5-7 days
Payment Terms	T/T,Paypal,Western Union,Money gram
Supply Ability	250,000PCS Per Month

3. Product infringement situation:

Storage Conditions:	Storage Temperature: -10 ~ +40 . Relative Humidity: ≤ 75%RH. Keep away from corrosive atmosphere and sunlight.
2.Period of Storage:	1 year.

Recommended Applications

- Switch mode power supply
- Electric motor
- Transformer
- Adapter
- Projector
- Halogen lamp
- ◆ LED driver circuit

Storage Conditions of Products


Storage Conditions:
 Storage Temperature: -10°C ~ +40°C.
 Relative Humidity: ≤ 75%RH.
 Keep away from corrosive atmosphere and sunlight.


Period of Storage: 1 year.

Part Number Code

MF72	SCN	8D	-	-
(1)	(2)	(3)		(4)

- (1) MF72: MF72 Series.
- (2) SCN: Socay NTC.
- (3) 8D: Zero Power Resistance at 25 °C (R₂₅): 8=8Ω.
- (4) Body Size: 13=Φ13mm.

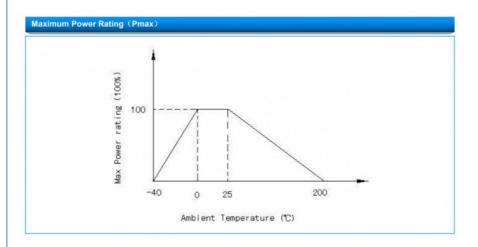

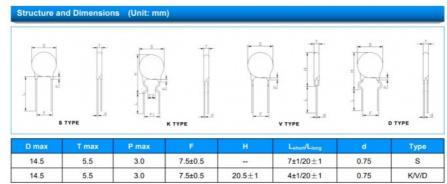

Note: Length of Pin (L) can be customized.

Packing:

Part Number	Type of L	Quantity(pcs/bag)
MF72-SCN10D-13	L short	250
	L long	250

Item	Test conditions / Methods	Test Result	
Tensile Strength of Terminals	Fasten body with a Load Applied to each lead 3.0Kg for 1sec.	No break out and damage	
Bending Strength of Terminals	Fixed body hand 1.0kg on one terminal bend 90 then back again oppsite.	No break out and damage	
Solder Ability	When the Lead wire was dipped into bath 0f 235 \pm 5 $^{\circ}$ C for 3 seconds after immersion in 25% rosin flux the solder ability ratio of lead wire surface should more than 95%.	More than 95% solder abilit	
Temp. Cycle Test	(-40°C×→+25°C×3min) × 5Cycles (-85°C×→+25°C×3min) × 5Cycles	ΔR/R ≤ ±20 %	
Humidity Test	45℃ 95%RH×1000 hours	ΔR/R ≤ ±20 %	
Load Life	6 AMP×1000 hours	ΔR/R ≤ ±20 %	
Insulation Test	DC 700V	R≥500MΩ	

Product shown:









Company Information:











5 invention patents

42 utility model patents

16 Design patent





Shiping Service:











FAQ:

Q: May we get some samples?

A: Of course, samples are available.

Q: What is product lead time?
A: For GDT,TVS and ESD,lead time will take 3-4 weeks.For TSS,MOV,MLV,NTC,and PPTC,lead time will take 4-6 weeks. Accurate lead time will be further confirmed when we know your specific requirement.

Q: Do you support customization?

A: Yes,we do.

Please feel free to contact us if you have any question.

Contact Person: Aria Wei

Tel/WhatsApp/Wechat/Skype: +8615778830733

Email Address: sc72@socay.com

Website: www.socay.com / www.socay.en.alibaba.com

Address: Floor 4, Building C, Hengxing Science park, No.19 Minqing Road, Longhua District, Shenzhen

Socay Shenzhen Socay Electronics Co., Ltd.

+8618126201429

sylvia@socay.com



socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City, GuangDong Province, China