


3000W SMDJ Series SMDJ5.0A Surface Mount TVS Diode VRWM 5.0V Transient Voltage Suppressor

Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: SOCAY
- Certification: UL, REACH, RoHS, ISO
- Model Number: SMDJ5.0A
- Minimum Order Quantity: 3000PCS
- Price: Negotiable
- Delivery Time: 5-8 work days



Product Specification

- Product Name: TVS Diodes
- Package Type: DO-214AB/SMC
- Vrwm: 5.0V
- Vbr@It (Min.): 6.40V
- Vbr@It (Max.): 7.00V
- It: 10mA
- Vc@Ipp: 9.2V
- Ipp: 326.09A
- Ir@Vrwm: 1000μA
- Storage Temperature Range: -55 To +150



Product Description

3000W SMDJ Series SMDJ5.0A Surface Mount TVS Diode VRWM 5.0V Transient Voltage Suppressor

DATASHEET: [SMDJ_v2107.1 .pdf](#)

Description:



The SMDJ series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

Part Number		Marking		Reverse Stand-Off Voltage V_{RWM} (V)	Breakdown Voltage V_{BR} (V) @ I_T		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{PP} (V)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage I_R @ V_{RWM} (μA)
Uni	Bi	Uni	Bi		MIN	MAX				
SMDJ5.0A	SMDJ5.0CA	RDE	DDE	5.0	6.40	7.00	10	9.2	326.09	1000
SMDJ6.0A	SMDJ6.0CA	RDG	DDG	6.0	6.67	7.37	10	10.3	291.26	1000
SMDJ6.5A	SMDJ6.5CA	RDK	DDK	6.5	7.22	7.98	10	11.2	267.86	500
SMDJ7.0A	SMDJ7.0CA	PDM	DDM	7.0	7.78	8.60	10	12.0	250.00	200
SMDJ7.5A	SMDJ7.5CA	PDP	DDP	7.5	8.33	9.21	1	12.9	232.56	100
SMDJ8.0A	SMDJ8.0CA	PDR	DDR	8.0	8.89	9.83	1	13.6	220.59	50
SMDJ8.5A	SMDJ8.5CA	PDT	DDT	8.5	9.44	10.40	1	14.4	208.33	25
SMDJ9.0A	SMDJ9.0CA	PDV	DDV	9.0	10.00	11.10	1	15.4	194.81	10
SMDJ10A	SMDJ10CA	PDX	DDX	10.0	11.10	12.30	1	17.0	176.47	5
SMDJ11A	SMDJ11CA	PDZ	DDZ	11.0	12.20	13.50	1	18.2	164.84	5
SMDJ12A	SMDJ12CA	PEE	DEE	12.0	13.30	14.70	1	19.9	150.75	5
SMDJ13A	SMDJ13CA	PEG	DEG	13.0	14.40	15.90	1	21.5	139.53	5
SMDJ14A	SMDJ14CA	PEK	DEK	14.0	15.60	17.20	1	23.2	129.31	5
SMDJ15A	SMDJ15CA	PEM	DEM	15.0	16.70	18.50	1	24.4	122.95	5
SMDJ16A	SMDJ16CA	PEP	DEP	16.0	17.80	19.70	1	26.0	115.38	5
SMDJ17A	SMDJ17CA	PER	DER	17.0	18.90	20.90	1	27.6	108.70	5
SMDJ18A	SMDJ18CA	PET	DET	18.0	20.00	22.10	1	29.2	102.74	5
SMDJ19A	SMDJ19CA	PEB	DEB	19.0	21.10	23.30	1	30.8	97.47	5
SMDJ20A	SMDJ20CA	PEV	DEV	20.0	22.20	24.50	1	32.4	92.59	5
SMDJ22A	SMDJ22CA	PEX	DEX	22.0	24.40	26.90	1	35.5	84.51	5
SMDJ24A	SMDJ24CA	PEZ	DEZ	24.0	26.70	29.50	1	38.9	77.12	5
SMDJ26A	SMDJ26CA	PFE	DFE	26.0	28.90	31.90	1	42.1	71.26	5
SMDJ28A	SMDJ28CA	PFG	DFG	28.0	31.10	34.40	1	45.4	66.08	5
SMDJ30A	SMDJ30CA	PFK	DFK	30.0	33.30	36.80	1	48.4	61.98	5
SMDJ33A	SMDJ33CA	PFM	DFM	33.0	36.70	40.60	1	53.3	56.29	5
SMDJ36A	SMDJ36CA	PFP	DFP	36.0	40.00	44.20	1	58.1	51.64	5

SMDJ40 A	SMDJ40 CA	PFR	DFR	40.0	44.40	49.10	1	64.5	46.51	5
SMDJ43 A	SMDJ43 CA	PFT	DFT	43.0	47.80	52.80	1	69.4	43.23	5
SMDJ45A	SMDJ45 CA	PFV	DFV	45.0	50.00	55.30	1	72.7	41.27	5
SMDJ48A	SMDJ48 CA	PFX	DFX	48.0	53.30	58.90	1	77.4	38.76	5
SMDJ51A	SMDJ51 CA	PFZ	DFZ	51.0	56.70	62.70	1	82.4	36.41	5
SMDJ54A	SMDJ54 CA	RGE	DGE	54.0	60.00	66.30	1	87.1	34.44	5
SMDJ58A	SMDJ58 CA	PGG	DGG	58.0	64.40	71.20	1	93.6	32.05	5
SMDJ60A	SMDJ60 CA	PGK	DGK	60.0	66.70	73.70	1	96.8	30.99	5
SMDJ64A	SMDJ64 CA	PGM	DGM	64.0	71.10	78.60	1	103.0	29.13	5
SMDJ70A	SMDJ70 CA	PGP	DGP	70.0	77.80	86.00	1	113.0	26.55	5
SMDJ75A	SMDJ75 CA	PGR	DGR	75.0	83.30	92.10	1	121.0	24.79	5
SMDJ78A	SMDJ78 CA	PGT	DGT	78.0	86.70	95.80	1	126.0	23.81	5
SMDJ80A	SMDJ80 CA	PGB	DGB	80.0	88.80	97.60	1	129.6	23.15	5
SMDJ85A	SMDJ85 CA	PGV	DGV	85.0	94.40	104.00	1	137.0	21.90	5
SMDJ90A	SMDJ90 CA	PGX	DGX	90.0	100.00	111.00	1	146.0	20.55	5
SMDJ100 A	SMDJ100 CA	PGZ	DGZ	100.0	111.00	123.00	1	162.0	18.52	5
SMDJ110 A	SMDJ110 CA	PHE	DHE	110.0	122.00	135.00	1	177.0	16.95	5
SMDJ120 A	SMDJ120 CA	PHG	DHG	120.0	133.00	147.00	1	193.0	15.54	5
SMDJ130 A	SMDJ130 CA	PHK	DHK	130.0	144.00	159.00	1	209.0	14.35	5
SMDJ140 A	SMDJ140 CA	PHB	DHB	140.0	155.00	171.00	1	226.8	13.23	5
SMDJ150 A	SMDJ150 CA	PHM	DHM	150.0	167.00	185.00	1	243.0	12.35	5
SMDJ160 A	SMDJ160 CA	PHP	DHP	160.0	178.00	197.00	1	259.0	11.58	5
SMDJ170 A	SMDJ170 CA	PHR	DHR	170.0	189.00	209.00	1	275.0	10.91	5
SMDJ180 A	SMDJ180 CA	PHT	DHT	180.0	201.00	220.00	1	291.6	10.29	5
SMDJ190 A	SMDJ190 CA	PHV	DHV	190.0	211.00	232.00	1	307.8	9.75	5
SMDJ200 A	SMDJ200 CA	PHW	DHW	200.0	224.00	247.00	1	324.0	9.26	5
SMDJ220 A	SMDJ220 CA	PHX	DHX	220.0	246.00	272.00	1	356.0	8.43	5
SMDJ250 A	SMDJ250 CA	PHZ	DHZ	250.0	279.00	309.00	1	405.0	7.41	5
SMDJ300 A	SMDJ300 CA	PJE	DJE	300.0	335.00	371.00	1	486.0	6.17	5
SMDJ350 A	SMDJ350 CA	PJG	DJG	350.0	391.00	432.00	1	567.0	5.29	5
SMDJ400 A	SMDJ400 CA	PJK	DJK	400.0	447.00	494.00	1	648.0	4.63	5
SMDJ440 A	SMDJ440 CA	PJM	DJM	440.0	492.00	543.00	1	713.0	4.21	5

Notes:

1. Suffix 'A' denotes 5% tolerance device.
2. Add suffix 'CA' after part number to specify Bi-directional devices.
3. For Bi-Directional devices having V_R of 10 volts and under, the I_R limit is double.

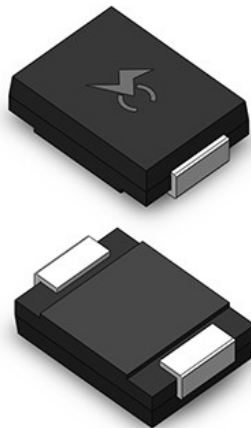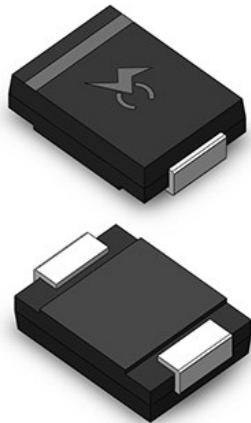**Features:**

- For surface mounted applications in order to optimize board space
- Low leakage
- Uni and Bidirectional unit
- Glass passivated junction
- Low inductance
- Excellent clamping capability
- 3000W Peak power capability at $10 \times 1000\mu\text{s}$ waveform Repetition rate (duty cycle):0.01%
- Fast response time: typically less than 1.0ps from 0 Volts to V_{BR} min
- Typical I_R less than 5 μA above 12V.
- High Temperature soldering: 260°C/40 seconds at terminals
- Typical maximum temperature coefficient $\Delta V_{BR} = 0.1\% \times V_{BR}@25^\circ\text{C} \times \Delta T$
- Plastic package has Underwriters Laboratory Flammability 94V-0
- Matte tin lead-free Plated

Halogen free and RoHS compliant

Typical failure mode is short from over-specified voltage or current

Whisker test is conducted based on JEDEC JESD201A per its table 4a and 4c

IEC-61000-4-2 ESD 15kV(Air), 8kV (Contact)

ESD protection of data lines in accordance with IEC 61000-4-2 (IEC801-2)

EFT protection of data lines in accordance with IEC 61000-4-4 (IEC801-4)

Applications:


TVS devices are ideal for the protection of I/O interfaces, VCC bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications .

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation with a 10/1000µs waveform (Fig.1)(Note 1), (Note 2)	P_{PPM}	3000	Watts
Peak Pulse Current with a 10/1000µs waveform.(Note1, Fig.3)	I_{PP}	See Next Table	Amps
Power Dissipation on Infinite Heat Sink at $T_L=75^\circ\text{C}$	$P_{M(AV)}$	6.0	Watt
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)	I_{FSM}	300	Amps
Maximum Instantaneous Forward Voltage at 25A for Unidirectional Only (Note 4)	V_F	3.5/5.0	Voltage
Operating junction and Storage Temperature Range.	T_J, T_{STG}	-55 to +150	

Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2.
2. Mounted on 5.0mm x 5.0mm (0.03mm thick) Copper Pads to each terminal.
3. 8.3ms single half sine-wave, or equivalent square wave, Duty cycle = 4 pulses per minutes maximum.
4. $V_F < 3.5\text{V}$ for $V_{BR} < 200\text{V}$ and $V_F < 6.5\text{V}$ for $V_{BR} > 201\text{V}$.

Functional Diagram

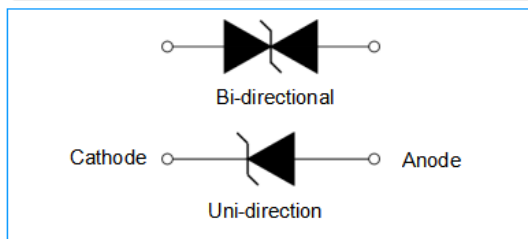

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1 - Peak Pulse Power Rating Curve

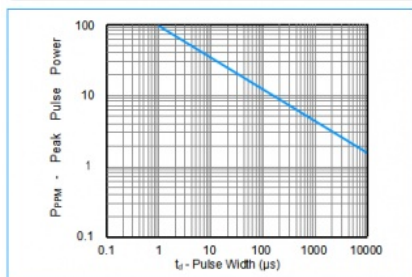


Figure 2 - Pulse Derating Curve

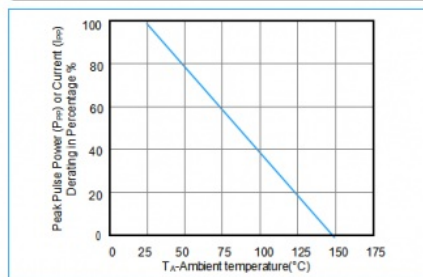


Figure 3 - Pulse Waveform

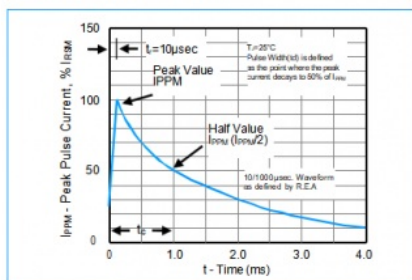


Figure 4 - Typical Junction Capacitance

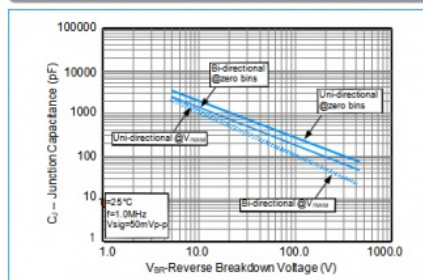


Figure 5 - Steady State Power Derating Curve




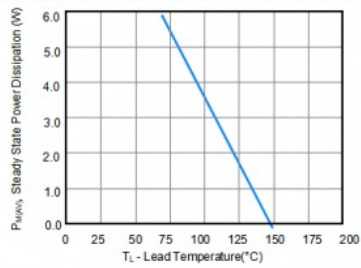


Figure 6 - Maximum Non-Repetitive Surge Current

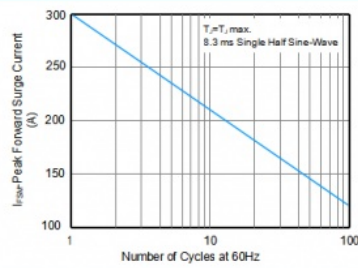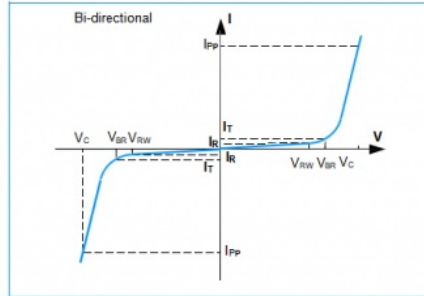

I-V Curve Characteristics

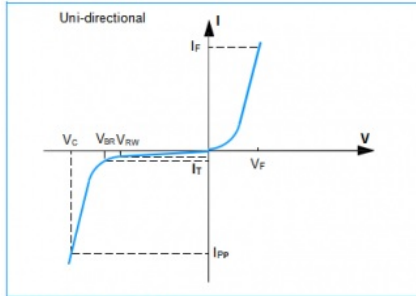


Physical Specifications

Weight	0.007 ounce, 0.21 gram
Case	JEDEC DO-214AB Molded Plastic over glass passivated junction
Polarity	Color band denotes cathode except Bipolar
Terminal	Matte Tin-plated leads, Solderable per JESD22-B102D

Environmental Specifications

Temperature Cycle	JESD22-A104
Pressure Cooker	JESD22-A102
High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Thermal Shock	JESD22-A106


Soldering Parameters

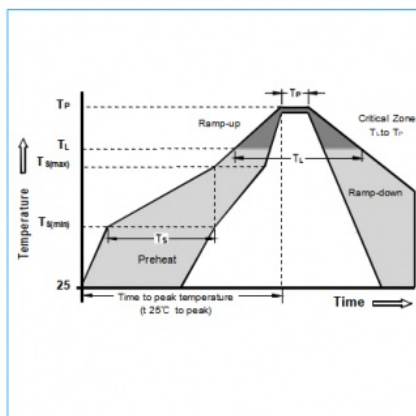

Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	150°C
	-Temperature Max ($T_{s(max)}$)	200°C
	-Time (min to max) (T_s)	60 -180 Seconds
Average ramp up rate (Liquidus Temp T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Time (min to max) (T_L)	60 -150 Seconds
Peak Temperature (T_P)		260 $\pm$ 0/-5°C
Time within 5°C of actual peak Temperature (t_p)		20 -40 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max
Do not exceed		280°C

Dimensions


DO-214AB (SMC)

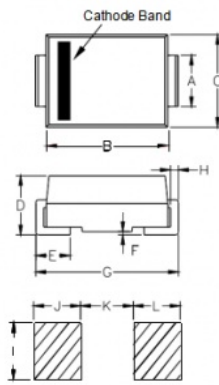


Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.108	0.126	2.750	3.200
B	0.260	0.280	6.520	7.110
C	0.217	0.244	5.520	6.220
D	0.080	0.112	2.050	2.850
E	0.030	0.060	0.750	1.520
F	-	0.008	-	0.203
G	0.305	0.320	7.640	8.130
H	0.006	0.012	0.150	0.310
I	0.121	-	3.070	-
J	0.068	-	1.715	-
K	-	0.185	-	4.690
L	0.068	-	1.715	-

Part Numbering

SMDJ × × × CA

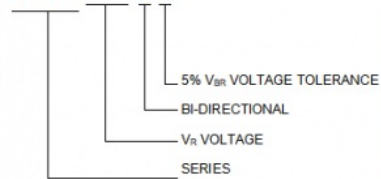


Part Marking



Packaging

Part Number	Component Package	Reel (pcs)	Per Carton (pcs)	Packaging Option	Reel Diameters (mm)
SMDJXXXXX	DO-214AB (SMC)	3000	48000	Tape & Reel -20mm/13*tape	330.0

Tape and Reel Specifications

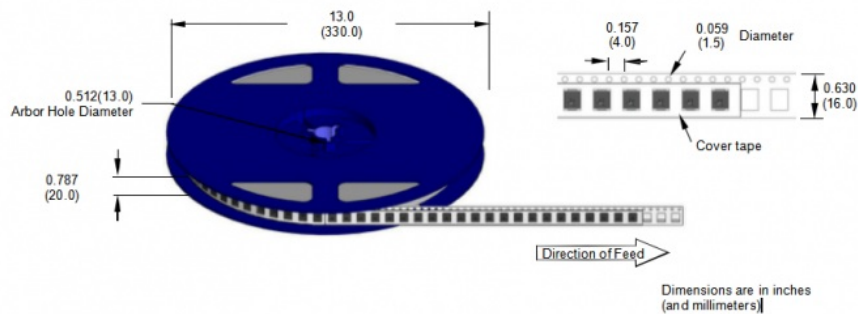

SOCAY® Shenzhen Socay Electronics Co., Ltd.



+8618126201429



sylvia@socay.com



socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City, Guangdong Province, China